



HIGHWAY

HT60-156M
HT60-156M(V) * V means 1500V module
285W-300W

Comprehensive and first-rate certification system

IEC61215:2016, IEC61730:2016 Latest Standard
 ISO9001, ISO14001 and OHSAS18001, meeting the highest international standards
 Strict quality control



IEC
 IEC 61215:2016
 IEC 61730:2016

Advanced surface treatment, less surface reflection and 5BB cell design can reduce the series resistance and improve the module efficiency

18.4%
 Module Efficiency

Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs

1000Pa
 Certified to withstand dynamic mechanical load 1000 Pascal

P_{kw}
 Higher module's output power

PID
 PID resistant

NH₃
 Ammonia corrosion resistant
 Salt Mist Corrosion resistant



Microcrack resistant
 Triple EL tested of high quality control.

Entire module certified to withstand extreme wind (2400 Pa) and snow loads (5400 Pa)

ISO
 Strict quality control, meeting the highest international standards: ISO 9001, ISO14001 and OHSAS18001

All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

Engineering Drawing

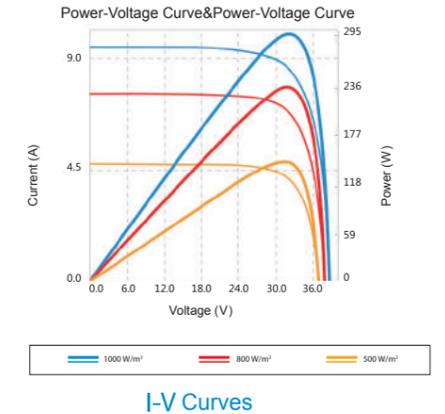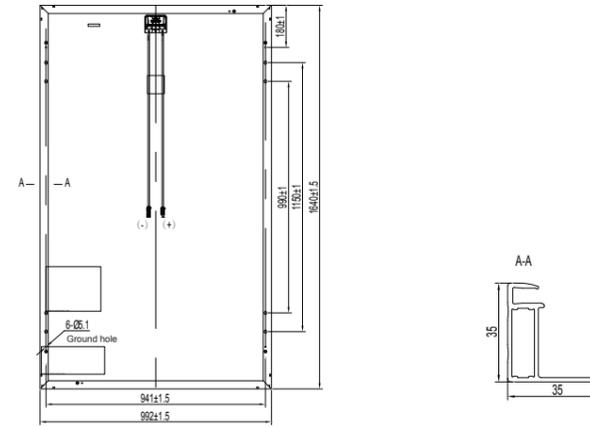

Electrical Characteristics

Module	HT60-156M / HT60-156M(V)			
Maximum Power at STC(P _{max})	285W	290W	295W	300W
Open-Circuit Voltage(V _{oc})	38.6V	39.0V	39.2V	39.4V
Short-Circuit Current(I _{sc})	9.71A	9.78A	9.87A	9.96A
Optimum Operating Voltage (V _{mp})	31.9V	32.1V	32.3V	32.5V
Optimum Operating Current(I _{mp})	8.96A	9.07A	9.16A	9.25A
Module Efficiency	17.5%	17.8%	18.1%	18.4%
Power Tolerance	0 ~ +5W			
Maximum System Voltage	1000V/1500V DC(IEC)			
Maximum Series Fuse Rating	15A			
Operating Temperature	-40 °C to +85 °C			


STC: Irradiance 1000W/m², module temperature 25, AM=1.5
 Optional black frame or white frame module according to customer requirements

Temperature Characteristics

Temperature Coefficient of P _{max}	γ (P _m)	-0.39%/K
Temperature Coefficient of V _{oc}	β (V _{oc})	-0.29%/K
Temperature Coefficient of I _{sc}	α (I _{sc})	0.049%/K

Warranty

- 10ys 10-year product warranty
- 25ys 25-year warranty on power output

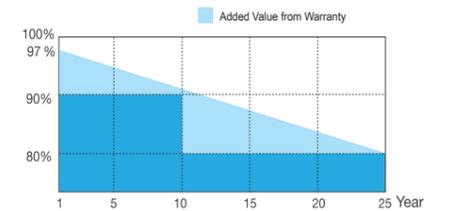

NOCT

Module	HT60-156M / HT60-156M(V)			
Maximum Power	211W	215W	219W	222W
Open Circuit Voltage (V _{oc})	36.5V	36.9V	37.0V	37.2V
Short Circuit Current (I _{sc})	7.84A	7.90A	7.97A	8.04A
Maximum Power Voltage (V _{mp})	30.1V	30.3V	30.5V	30.7V
Maximum Circuit Current (I _{mp})	7.01A	7.10A	7.18A	7.23A
NOCT	44 °C ± 2 °C			

NOCT: Irradiance 800W/m², ambient temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics

Solar Cells	Monocrystalline 156.75 × 156.75mm
No. of Cells	60 (6 × 10)
Dimensions	1640 × 992 × 35mm (64.6 × 39 × 1.4in)
Weight	18.5kg (40.8lbs)
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP67
Cable	4mm ² (IEC)
Connectors	MC4/MC4 Compatible
Packaging Configuration	30pcs/box, 840pcs/40'HQ Container

Information Box

Shanghai Aerospace Automobile Electromechanical Co., Ltd.
 website: www.ht-saae.com

Factory: Lianyungang ShenZhou New Energy Co., Ltd.