



• Easier • Faster • Safer

Get an immediate ROI with simultaneous improvement in both productivity and safety.




Rotatruck[®] vs. Handtruck

Leverage Plus[™]

The smaller Rotacaster wheel at the front gives the Rotatruck greater leverage than traditional 2-wheelers, making it easier to pull back, park, lever and balance loads.

More leverage, less effort

32% less pull-back effort
55% less general handling effort

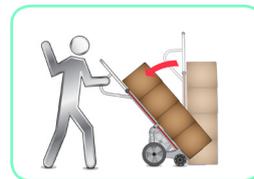

Easier pull-back effort
& no need to park at waypoints.



Parking and pulling back loads at waypoints increases strain on musculoskeletal structure.

Hands Free Balance[™]

The Rotatruck's compact, multi-directional wheel base fully supports loads without operator input. No need to park or pull back loads as frequently.

Just push, don't carry

0kg load to carry



The Rotatruck carries the load, not the operator.




Constant operator input to maintain load balance exerting strain and effort.

Magic Step Up[™]


The fixed orientation of the Rotacaster wheel allows you to step and lever loads instead of turning and reversing (over obstacles), with 78% less effort and 63% faster.

Lever, don't lift

78% less lifting effort
63% faster negotiating kerbs

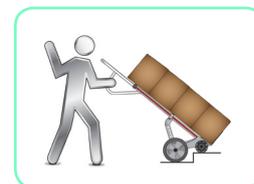


Up kerbs or over obstructions without reversing.

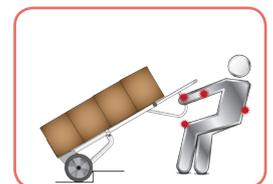

Maximum effort required to reverse and pull load up a kerb.

Single Gas Cylinder Rotatruck

The Single Gas Cylinder Rotatruck is the easiest, quickest and safest way to handle large heavy gas or LPG cylinders. It's ergonomic design eliminates bending and minimises the effort required to lift and transfer cylinder to and from pallets.

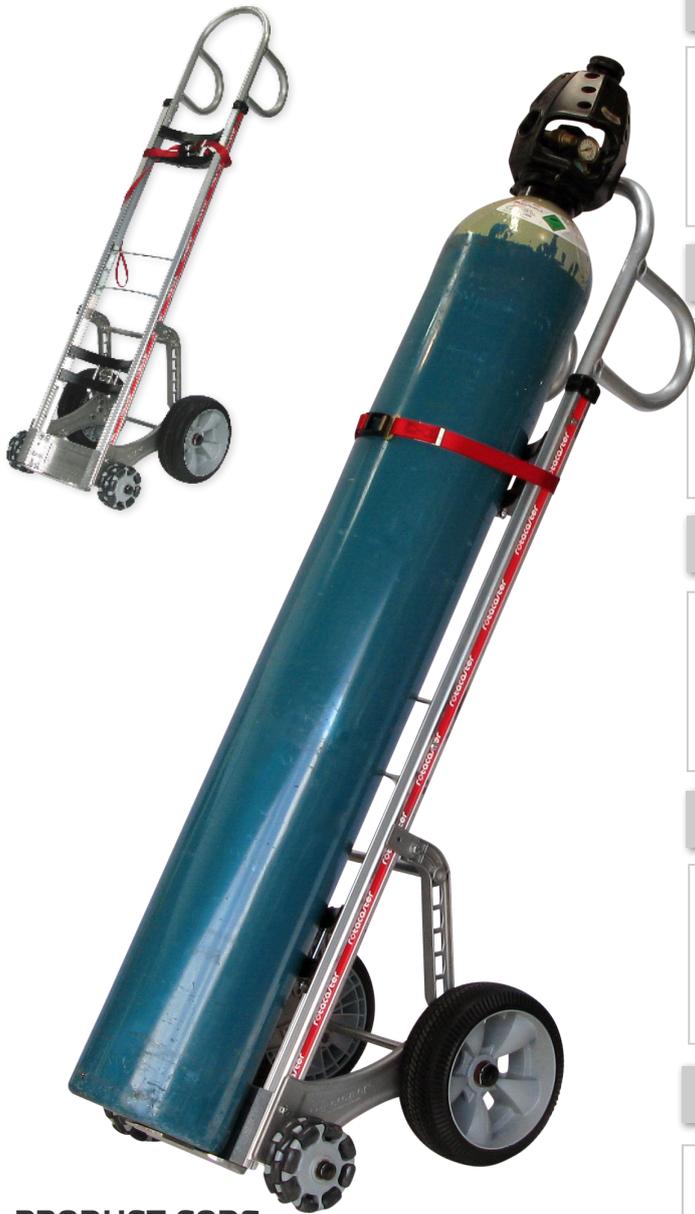

PRODUCT CODE: 11-23G1

Load Capacity: 150kg
Dimensions: 1620 x 430 x 510mm
Weight: 17kg

COMPONENTS

- Double loop handle
- Extended hi-strength curved frame
- 250mm foam filled rear wheels
- R3 triple 125mm front wheels
- 140x80mm extruded aluminum nose
- Safety Strap
- 2 Load Magnets

Self-Supporting Wheel Base

Self-supporting **multi-directional** Rotatrucks™ are based on a **highly manoeuvrable** four wheeled base that increases productivity.



Aluminium Gas Nose

225mm x 80mm **aluminium gas nose** for easy cylinder handling. Optional 225x 80mm **aluminium LPG nose** available.



Serrated Nose

Serrated underside for safe grip on pallets and easy de-palletising.



Load Magnets

Magnets secure the load to frame and minimise the need for user input when loading and unloading.



Safety Strap

A **Safety Strap** minimises cylinder movement when transporting for increased load safety.



Puncture Proof Rear Wheel

Puncture proof **Microcell foam rear wheels** navigate with ease through rough surfaces.



Used by  **BOC**
A Member of The Linde Group

 **Linde**

 **AIR LIQUIDE**
ADVANCED BUSINESS & TECHNOLOGIES